


IG785C

INDUSTRIAL RANGE
POWER BY CUMMINS

IGNT

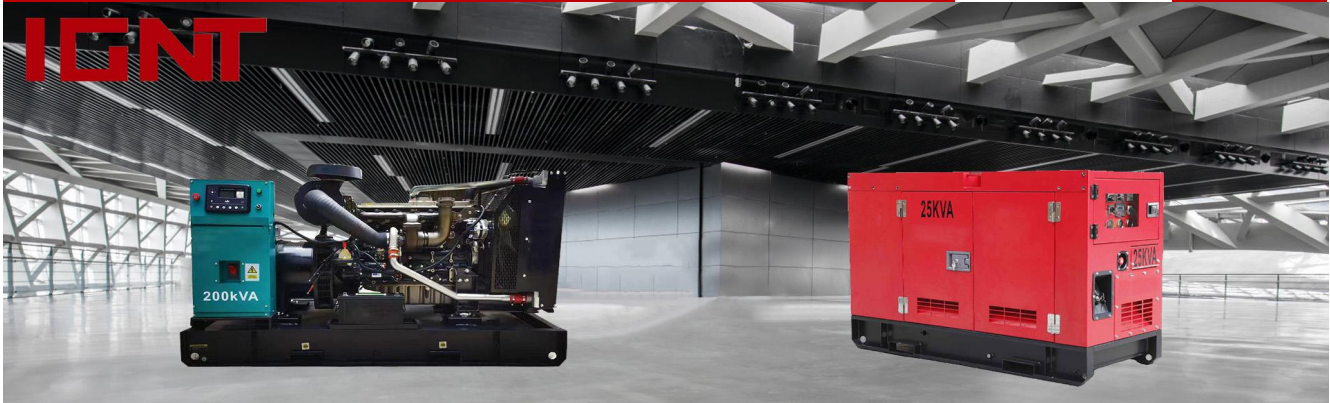

POWER DEFINITION

PRP: Prime Power is required for continuous operation under variable load and infinite operating hours per year.

ESP: Standby power refers to the ability of the generator to operate at varying loads in the event of power outage, with an annual operating time of up to 200h.

STANDARD USAGE CONDITIONS:

1. Altitude: below 1000 meters;
2. Environmental temperature: 25 °C
3. Relative humidity: 30%

ABOUT NOISE:

The noise level of the generator largely depends on the installation conditions and usage environment, so it is not possible to specify the noise value in manual. The noise value we provide is based on laboratory testing and is for reference.

QUALIFICATION STANDARD

IGNT POWER generator set complies with ISO and CE standards, which also include the following certification standards:

- ISO 1400:2015 Environmental System;
- ISO 45001:2018 Safety System;
- ISO 9001:2015 Quality System

	SERVICE	PRP	ESP
Power	KVA	713	784
Power	KW	570	627
Standard Voltage	V	400/230	
Available Voltage	v	380/220	415/240
Rated Current	A	1028	
Frequency/Speed	HZ/RPM	50/1500	

Weight and Dimension

	Dimension	Open	Silent
Length	(L) mm	4400	6096
Width	(W) mm	1760	2438
Height	(H) mm	2250	2592
Net Weight	KG		
Fuel Tank	L		

IG785C

INDUSTRIAL RANGE
POWER BY CUMMINS

IGNT

Engine Specifications

General Engine Data -- CUMMINS CCEC	
Engine Model	KTA38-G1
Governer	E
Cycle	4 stroke
No. of Cylinders	12
Displacement (L)	38
Bore* Stroke (mm)	159*159
Compression Ratio	14.5
Rated Net Power(KW)	570
Aspiration	Turbo-charged

Air intake system	
Clean filter	kPa 3.73
Dirty filter	kPa /
Intake air alarm tem.	°C 82

Lubrication System	
Max. oil temperature	°C 121
Idle speed	kPa 138
Rated speed	kPa 310-448

Alternator Specifications

Alternator Date-- IGNT	
Alternator Model	IA634B
Phase	3
Voltage (V)	400
Prime Power (KW)	570
Pole	4
Excitation System	If-excited, Brushless
No. of Bearing	1
Power Factor	0.8
Wiring Connection	3 Phases, 4 Wires
Insulation Grade	H/H
Protection Grade	IP23
Voltage Regulation (%)	±0.5

Fuel System	
Clean Fuel filter	kPa 13.55
Dirty Fuel filter	kPa 33.86
with check valves	kPa 22
less check valves	kPa 8
min allowable fuel tank	L/h 425
Fuel Tank Capacity (Silent)	L /

Starter System	
Start Motor Voltage	V 24
No. of Batteries	2

Cooling System	
Coolant capacity heat exchanger	L 66
Coolant capacity explanation tank	L 112
Max.coolant cycling resistance exterior engine	48.3kPa

Exhaust system	
Max.exhaust temperature	°C /
Exhaust pipe size acceptable	mm 152
Max.back pressure	kPa 10

Alternator Date-- Stamford	
Alternator Model	S5L1D-G4
Phase	3
Voltage	V 400
Prime Power	KW 570
Pole	4
Excitation System	Self-excited, Brushless
No. of Bearing	3
Power Factor	0.8
Wiring Connection	3 Phases, 4 Wires
Insulation Grade	H/H
Protection Grade	IP23
Voltage Regulation	% ±0.5

Controller Specifications

Control Panel Date-- Deepsea DSE6120

- | | |
|--|--|
| ● Built in PLC logic programming | ● Generator/load current monitoring and protection |
| ● Generator voltage detection | ● Fuel pump control function |
| ● Mains voltage detection | ● Can connect to all expansion modules |
| ● Generator/load power detection (kW, kVA, kVAR, pf) | ● Capable of graded loading |
| ● Generator overload protection (kW) | ● Engine speed protection |
| ● Equipped with manual closing and opening functions | ● Engine preheating |
| ● Start gen-set when the battery voltage is low | ● Engine starts rapidly&stops rapidly |
| ● LCD and LED alarm indication | ● Custom remote start signal |

Generator Specifications

Standard Configuration

- 50°C radiator for belt driven fan
- 12/24V charging alternator
- One set of air/fuel/oil filters
- Chassis with integrated fuel tank
- Emergency stop button
- Anti-vibration shock absorbers
- Main circuit breaker/ MCCB
- Auto control system
- User manual

Optional Configuration

- Battery charger
- Engine pre-heater
- Alternator pre-heater
- PMG/ AREP/ MAUX
- Water-oil separator
- Inside automatic transfer switch/ ATS box
- Grounding copper rod
- Remote control system
- Switch box

Warranty of Generator Set

Cummins Engine

One year or 1000 running hours whichever comes first

Generator

One year or 1000 running hours whichever comes first

Email: ignt@igntpower.com

Web: www.igntpower.com