


IG3025WP

INDUSTRIAL RANGE
POWER BY WEICHAI

IGNT

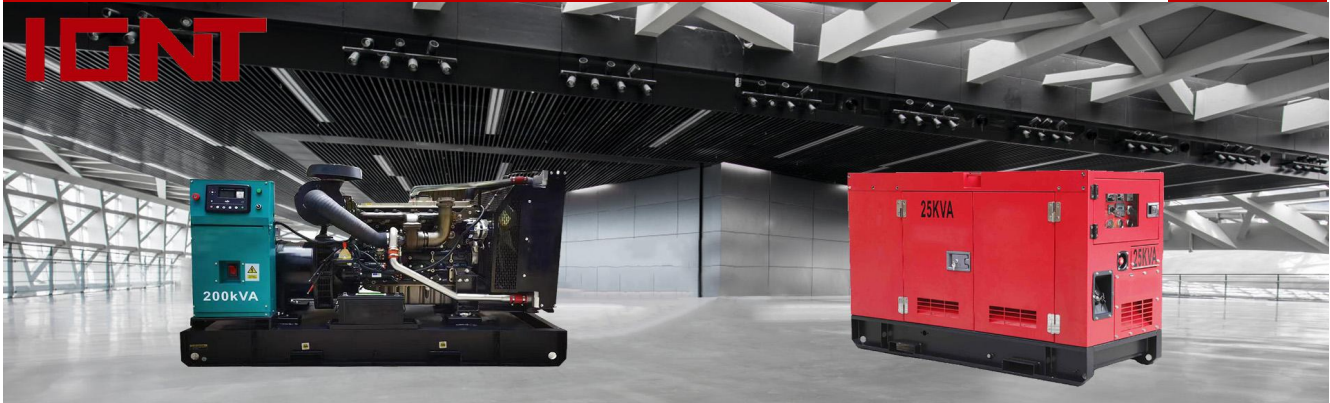

POWER DEFINITION

PRP: Prime Power is required for continuous operation under variable load and infinite operating hours per year.

ESP: Standby power refers to the ability of the generator to operate at varying loads in the event of power outage, with an annual operating time of up to 200h.

STANDARD USAGE CONDITIONS:

1. Altitude: below 1000 meters;
2. Environmental temperature: 25 °C
3. Relative humidity: 30%

ABOUT NOISE:

The noise level of the generator largely depends on the installation conditions and usage environment, so it is not possible to specify the noise value in manual. The noise value we provide is based on laboratory testing and is for reference.

QUALIFICATION STANDARD

IGNT POWER generator set complies with ISO and CE standards, which also include the following certification standards:
ISO 1400:2015 Environmental System;
ISO 45001:2018 Safety System;
ISO 9001:2015 Quality System

	SERVICE	PRP	ESP
Power	KVA	2750	3025
Power	KW	2200	2420
Standard Voltage	V	400/230	
Available Voltage	v	380/220	415/240
Rated Current	A	3969	
Frequency/Speed	HZ/RPM	50/1500	

Weight and Dimension

	Dimension	Open	Silent
Length	(L) mm	6500	12192
Width	(W) mm	2850	2438
Height	(H) mm	3290	2591
Net Weight	KG		
Fuel Tank	L		

IG3025WP

INDUSTRIAL RANGE
POWER BY WEICHAI

IGNT

Engine Specifications

General Engine Data -- WEICHAI		
Engine Model	12M55D2700E310	
Governer	ECU	
Aspiration	Turbocharged & intercooling	
No. of Cylinders	12	
Displacement (L)	65.65	
Bore* Stroke (mm)	180*215	
Compression Ratio	16.5	
Rated Net Power(KW)	2420	
Fuel system	Electronically controlled high pressure common rail	

Aspiration system		
Max inlet pressure	kPa	≤3
Combustion volume	L/s	/
Air flow	L/s	11499

Lubrication System		
Oil capacity	L	330
Oil consumption	g/kwh	0.25
Oil pressure	kPa	400-650

Alternator Specifications

Alternator Date-- IGNT		
Alternator Model	TCU528B	
Phase	3	
Voltage (V)	400	
Prime Power (KW)	2200	
Pole	4	
Excitation System	If-excited, Brushless	
No. of Bearing	1	
Power Factor	0.8	
Wiring Connection	3 Phases, 4 Wires	
Insulation Grade	H/H	
Protection Grade	IP23	
Voltage Regulation (%)	±0.5	

Fuel System		
Fuel Consumption @100% ESP	L/h	/
Fuel Consumption @100% PRP	L/h	507
Fuel Consumption @75% PRP	L/h	/
Fuel Consumption @50% PRP	L/h	/
Fuel Tank Capacity (Open)	L	4500
Fuel Tank Capacity (Silent)	L	/

Starter System		
Start Motor Voltage	V	24
No. of Batteries		2

Cooling System		
Total coolant capacity	L	210
Thermostat operation range	°C	44-56
Coolant alarm temperature	°C	203

Exhaust system		
Exhaust gas flow	L/s	12325
Max. exhaust temperature	°C	740
Max. allowed back pressure	kPa	15

Alternator Date-- Stamford		
Alternator Model	N/A	
Phase	3	
Voltage V	400	
Prime Power KW	2200	
Pole	4	
Excitation System	elf-excited, Brushless	
No. of Bearing	3	
Power Factor	0.8	
Wiring Connection	3 Phases, 4 Wires	
Insulation Grade	H/H	
Protection Grade	IP23	
Voltage Regulation %	±0.5	

Controller Specifications

Control Panel Date-- Deepsea DSE6120

- | | |
|--|--|
| ● Built in PLC logic programming | ● Generator/load current monitoring and protection |
| ● Generator voltage detection | ● Fuel pump control function |
| ● Mains voltage detection | ● Can connect to all expansion modules |
| ● Generator/load power detection (kW, kVA, kVAR, pf) | ● Capable of graded loading |
| ● Generator overload protection (kW) | ● Engine speed protection |
| ● Equipped with manual closing and opening functions | ● Engine preheating |
| ● Start gen-set when the battery voltage is low | ● Engine starts rapidly&stops rapidly |
| ● LCD and LED alarm indication | ● Custom remote start signal |

Generator Specifications

Standard Configuration

- 50°C radiator for belt driven fan
- 12/24V charging alternator
- One set of air/fuel/oil filters
- Chassis with integrated fuel tank
- Emergency stop button
- Anti-vibration shock absorbers
- Main circuit breaker/ MCCB
- Auto control system
- User manual

Optional Configuration

- Battery charger
- Engine pre-heater
- Alternator pre-heater
- PMG/ AREP/ MAUX
- Water-oil separator
- Inside automatic transfer switch/ ATS box
- Grounding copper rod
- Remote control system
- Switch box

Warranty of Generator Set

Cummins Engine

One year or 1000 running hours whichever comes first

Generator

One year or 1000 running hours whichever comes first

Email: ignt@igntpower.com

Web: www.igntpower.com