


IG88WP

INDUSTRIAL RANGE
POWER BY WEICHAI

IGNT

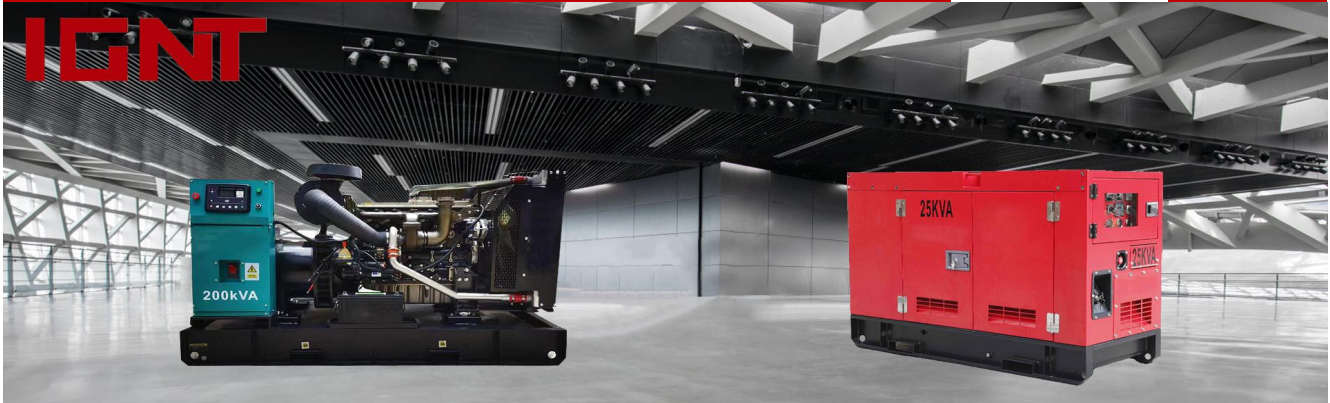

POWER DEFINITION

PRP: Prime Power is required for continuous operation under variable load and infinite operating hours per year.

ESP: Standby power refers to the ability of the generator to operate at varying loads in the event of power outage, with an annual operating time of up to 200h.

STANDARD USAGE CONDITIONS:

1. Altitude: below 1000 meters;
2. Environmental temperature: 25 °C
3. Relative humidity: 30%

ABOUT NOISE:

The noise level of the generator largely depends on the installation conditions and usage environment, so it is not possible to specify the noise value in manual. The noise value we provide is based on laboratory testing and is for reference.

QUALIFICATION STANDARD

IGNT POWER generator set complies with ISO and CE standards, which also include the following certification standards:
ISO 1400:2015 Environmental System;
ISO 45001:2018 Safety System;
ISO 9001:2015 Quality System

SERVICE		PRP	ESP
Power	KVA	80	88
Power	KW	64	70
Standard Voltage	V	400/230	
Available Voltage	v	380/220	415/240
Rated Current	A	115	
Frequency/Speed	HZ/RPM	50/1500	

Weight and Dimension

	Dimension		Open	Silent
Length	(L)	mm	1900	2690
Width	(W)	mm	870	1080
Height	(H)	mm	1180	1450
Net Weight		KG		
Fuel Tank		L	920	198

Engine Specifications

General Engine Data -- WEICHAI	
Engine Model	WP4.1D80E200
Governer	E
Aspiration	Turbocharged & No-intercooling
No. of Cylinders	4
Displacement (L)	4.1
Bore* Stroke (mm)	105*118
Compression Ratio	17.5
Rated Net Power(KW)	72
Fuel system	mechanical pump

Aspiration system		
Clean filter	kPa	≤3
Dirty filter	kPa	/
Air flow	m ³ /min	325

Lubrication System		
Oil capacity	L	13
Oil consumption	g/kwh	0.4
Oil pressure	kPa	300-500

Alternator Specifications

Alternator Date-- IGNT	
Alternator Model	IA224G
Phase	3
Voltage (V)	400
Prime Power (KW)	64
Pole	4
Excitation System	If-excited, Brushless
No. of Bearing	1
Power Factor	0.8
Wiring Connection	3 Phases, 4 Wires
Insulation Grade	H/H
Protection Grade	IP23
Voltage Regulation (%)	±0.5

Fuel System		
Fuel Consumption @100% ESP	L/h	/
Fuel Consumption @100% PRP	L/h	17.5
Fuel Consumption @75% PRP	L/h	/
Fuel Consumption @50% PRP	L/h	/
Fuel Tank Capacity	L	150
Fuel Tank Capacity (Silent)	L	/

Starter System		
Start Motor Voltage	V	24
No. of Batteries		2

Cooling System		
Total coolant capacity	L	9.4
Thermostat operation range	°C	76-89
Max water temperature	°C	98

Exhaust system		
Max.exhaust temperature	°C	560
Exhaust gas flow	m ³ /min	340.6
Max.allowed back pressure	kPa	10

Alternator Date-- Stamford	
Alternator Model	UCI224G
Phase	3
Voltage (V)	400
Prime Power (KW)	64
Pole	4
Excitation System	Self-excited, Brushless
No. of Bearing	3
Power Factor	0.8
Wiring Connection	3 Phases, 4 Wires
Insulation Grade	H/H
Protection Grade	IP23
Voltage Regulation (%)	±0.5

Controller Specifications

Control Panel Date-- Deepsea DSE6120

- | | |
|--|--|
| ● Built in PLC logic programming | ● Generator/load current monitoring and protection |
| ○ Generator voltage detection | ○ Fuel pump control function |
| ● Mains voltage detection | ● Can connect to all expansion modules |
| ○ Generator/load power detection (kW, kVA, kVar, pf) | ○ Capable of graded loading |
| ● Generator overload protection (kW) | ● Engine speed protection |
| ○ Equipped with manual closing and opening functions | ○ Engine preheating |
| ● Start gen-set when the battery voltage is low | ● Engine starts rapidly&stops rapidly |
| ○ LCD and LED alarm indication | ○ Custom remote start signal |

Generator Specifications

Standard Configuration

- 50°C radiator for belt driven fan
- 12/24V charging alternator
- One set of air/fuel/oil filters
- Chassis with integrated fuel tank
- Emergency stop button
- Anti-vibration shock absorbers
- Main circuit breaker/ MCCB
- Auto control system
- User manual

Optional Configuration

- Battery charger
- Engine pre-heater
- Alternator pre-heater
- PMG/ AREP/ MAUX
- Water-oil separator
- Inside automatic transfer switch/ ATS box
- Grounding copper rod
- Remote control system
- Switch box

Warranty of Generator Set

Cummins Engine

One year or 1000 running hours whichever comes first

Generator

One year or 1000 running hours whichever comes first

Email: ignt@igntpower.com

Web: www.igntpower.com